



2

# CONTENTS

Rebreather & Accessories	4
Computer & Accessories	12
Cylinders & Valves	16
Regulators & Gauges	18
BCDs & Wings	34
Weight Pockets & Belts	38
Suits & Accessories	40
Masks, Fins & Snorkels	44
Bags, Cases & Other Accessories	46
Apparel	50
Discontinued Products	54
Contacts	56

This mark \* after the article number indicates that is an Order Item, that we do not always have in stock.

Please contact sales for current status and delivery information.

This mark \*\* after the article number indicates that it is an Order Item that requires a minimum order quantity (MoQ). Contact sales for price, MoQ and delivery information.

Further information on products can be found at our homepage www.poseidon.com.

You can place your order on the internet at http://order.poseidon.com.

There you will also see your prices and order status as well as your complete order history.

Photo: Santiago Lucciano, A.Mathiesen-öhman, J.Nilsson, P.Andersson, A.Minnaar et.al.

### POSEIDON SE7EN+

Rebreather safety is no longer a guessing game. With the Poseidon SE7EN+ supporting the digital Solid State 02 Sensors, we ensure you know your PO2 reading is accurate.

The system comprises a breathing loop (mouthpiece, hoses, counter lungs, backpack and scrubber) with associated electronics module (with Smart battery and O2 sensors), and two independent gas cylinders.

One contains 100% compressed oxygen which is added to the breathing loop as the diver consumes it. The second cylinder typically contains compressed air "diluent" tocompensate for compression in the breathing loop as the diver goes deeper. It's also a backup system, containing enough oxygen for the diver to breathe directly in an emergency.

The SE7EN has big advantages over traditional open circuit equipment:

- > Get closer to marine life
- > Much more time underwater
- > Patented safety technology
- > Proven performance
- > Expandable system
- > Recreational or 100 m technical rebreather
- > Comfortable mouth-piece with patented BOV included
- > Dive Management System
- > Plug and play with Dive-by-Wire  $^{\rm TM}$
- > Solid State O2 Sensor enabled
- > Bluetooth connectivity
- > Automatic start-up testing procedure





### POSEIDON SE7EN+ SPORTS EDITION



### SE7EN SPORT PACKAGE

- > Poseidon SE7EN+ without Cover
- > Repackable Scrubber
- > Tank Belt MKVI / SE7EN
- > 11 inch adapter
- > Battery Module Rec 40 (Green)
- > Rebreather BCD, Recreational Counter Lungs or Back Mounted Counter Lungs
- > 3L Aluminium Cylinder Set 200 Bar or 3L Steel Cylinder Set 300/232 Bar

# Art. no. Description 6012-013 SE7EN SPORT Package EU version 6012-014 SE7EN SPORT Package Int version Cylinders and Cylinder valves are not included in the International version and must be purchased separately.

### POSEIDON SE7EN+ REC EDITION



Art. no.	Description
6012-015	SE7EN REC Package EU version
6012-016	SE7EN REC Package Int version Cylinders and Cylinder valves are not included in the International version and must be purchased separately.

- > Poseidon SE7EN+
- > Repackable Scrubber
- > Tank Belt MKVI / SE7EN
- > 11 inch adapter
- > Battery Module Rec 40 (Green)

SE7EN REC PACKAGE

- > Rebreather BCD, Recreational Counter Lungs or Back Mounted Counter Lungs
- > Poseidon M28 Computer CCR Ready
- > Connecting CAN Cable 1.25m / 4 ft
- > 3L Aluminium Cylinder Set 200 Bar or 3L Steel Cylinder Set 300 Bar

# POSEIDON SE7EN+ TEC EDITION





Recommended add on:
Redundant M28, cable and
C-pod for third oxygen sensor
Stainless Rebreather Stand

Art. no.	Description
6012-017	SE7EN TEC Package EU version
6012-018	SE7EN TEC Package Int version Cylinders and Cylinder valves are not included in the International version and must be purchased separately.

### SE7EN TEC PACKAGE

- > Poseidon SE7EN+
- > Repackable Scrubber
- > Tank Belt MKVI / SE7EN
- > 11 inch adapter
- > Battery Module Deep (Black)
- > Counter Lung Tech Pack with

  Manual Injection Pack or

  Back-Mounted Counter Lung with

  Manual Injection Pack Metal
- > Poseidon Harness w. backplate
- > Poseidon Wing WRB
- > RB Handle
- > Cylinder Inversion Kit
- > Poseidon M28 Computer CCR Ready
- > Connecting CAN Cable 1.25m / 4 ft
- > 3L Steel Cylinder Set 300 Bar

### POSEIDON SE7EN CUSTOM-BUILD:

Art. no.	Name	Description
6012-010	POSEIDON SE7EN	EU version incl. cover and battery charger.
6012-011	POSEIDON SE7EN	US version incl. cover and battery charger

For EU orders, the Poseidon SE7EN must ship with cylinders from the factory. Cylinders are not included within either the EU or US article numbers and cylinder type must be specified at the time of ordering for EU purchases.

### POPULAR ACCESSORIES:

Art. no.	Name	Description	
0600-200	POSEIDON M28 Dive Computer	It boasts maps, graphics, Dive-By-Wire™, and a host of features that deliver class-leading functionality	
0005-100	BCD QMR	Designed for easy assembly. The ideal solution for quick BCD attachment	
0000-468	11 Inch Adapter	The value choice for attaching your BCD	
0100-006	Jetstream Mk3 Octopus	The recommended Octopus for the POSEIDON SE7EN	
0650-032	Wing Man, Side Sling Case	Bring your bailout tank with you without bungees and straps	
0100-005	Jetstream Mk3 (Black)	Perfect regulator for your bailout kit	



# COUNTER LUNGS

Art. no.	Description	
6011-049	Standard Counter Lungs For the recreational rebreather diver. 6.2 liter volume.	. – N B
6011-050	Large Counter Lungs For the larger or technical	. –
	rebreather diver. 8.2 liter volume.	

MATERIAL: Ballistic Nylon

TECHNICAL FEATURE:

6.2 or 8.2 liter volume.



# MANUAL INJECTION PACK

Art. no.	Description
6011-051	Manual Injection Pack Manual addition of oxygen and diluent gases.



# BACK MOUNTED COUNTER LUNGS

For divers preferring the back mounted set-up of their rebreather wing/harness. Made for the Poseidon Rebreather Wing/ Harness the Back Mounted Counter Lungs have the same material and specifications as the technical counter lungs.

Over-the-Shoulder or Back Mounted Counter lungs is a matter of personal preference.

MATERIAL: Ballistic Nylon

Art. no.	Description
6011-066	Back Mounted Counter Lungs For the technical rebreather diver 8.2 liter volume.





Art	. no.	Description
60	11-074	Manual Addition Valve Pack - Metall for Back Mounted
		Counter Lungs 2 hose 110 cm

### BATTERY UPGRADE

40M REC, 60M TRIMIX AND DEEP

Recreational or Technical Rebreather.

A simple battery change upgrades your SE7EN to enable deeper dives, decompression management and mixed gases. This easy upgrade path makes the SE7EN the perfect machine to accompany on your journey as you gain experience as a rebreather diver.

Your battery is highly personalized. It saves your dive logs and nitrogen loading. It also contains a light and speaker that alert your buddy of any alarms. If you put your battery into somebody else's SE7EN, the more conservative settings will be used for your next dive.



Art. no.	Description	
6011-005	Battery Module - Rec 40	
6011-027	Battery Module - Deco 40	
6011-029*	Battery Module - Trimix 60	0
6011-036	Battery Module - Deep	•
-		

### MATERIAL:

Water sealed battery pack in robust plastic.

### TECHNICAL FEATURE:

The battery will upgrade your unit to the specific depth limit. The deeper version will also let you specify the trimix used through the PC config





# BREATHING LOOP CC HOSE

These hoses will make it possible for you to customize the lengths of the hoses to fit you better.

The standard length sold with the POSEIDON SE7EN is 346 mm.

Description
CC Hose 346 mm, pair
CC Hose 286 mm, pair
CC Hose 396 mm, pair



# MIFLEX HOSE POLYURETHANE

The Miflex Polyurethane hose delivers diluent air to the POSEIDON SE7EN mouthpiece.

This hose is of the highest caliber and is an excellent choice for use with both the POSEIDON SE7EN and Poseidon Xstream and Jetstream regulators.

Description
LP Hose Polyurethane 9/16-18, 90cm
LP Hose DIL 9/16-18, 20cm
LP Hose O2 9/16-18, 20cm
LP Hose DIL 9/16-18, 20cm w. 90 angle
LP Hose O2 9/16-18, 20cm w. 90 angle
LP Hose DIL 3/8M-9/16"F, 38cm
LP Hose O2 3/8M-9/16"F, 70cm



# MOUTHPIECE G7

Art. no.	Description	
0005-055	Mouthpiece G7	



# BATTERY CHARGER

Art. no.	Description	
6011-015	Battery Charger	



**BLIND PLUG** MOUTHPIECE

Art. no.	Description
0000-368*	Blind Plug Mouthpiece



POWER ADAPTER 12V

Description
Power Adapter 12V



ı	P-Hr	15F D	וו אנ	٦СМ

Art. no.	Description
0132-006	LP-Hose DIL 3/8"-3/8"M,



PLUG ADAPTERS 4-PLUG KIT

Art. no.	Description
6010-291	Plug Adapters 4-PLUG KIT
•	



# CYLINDER BRACKET COMPLETE


Art. no.	Description
0000-467	Cylinder Bracket Complete



3RD CELL CALIBRATION KIT

Calibration kit for use with 3rd cell holder. Makes O2 cell calibration easy to perform together with external computers.

Art. no.	Description
6011-055	3rd Cell Calibration Kit

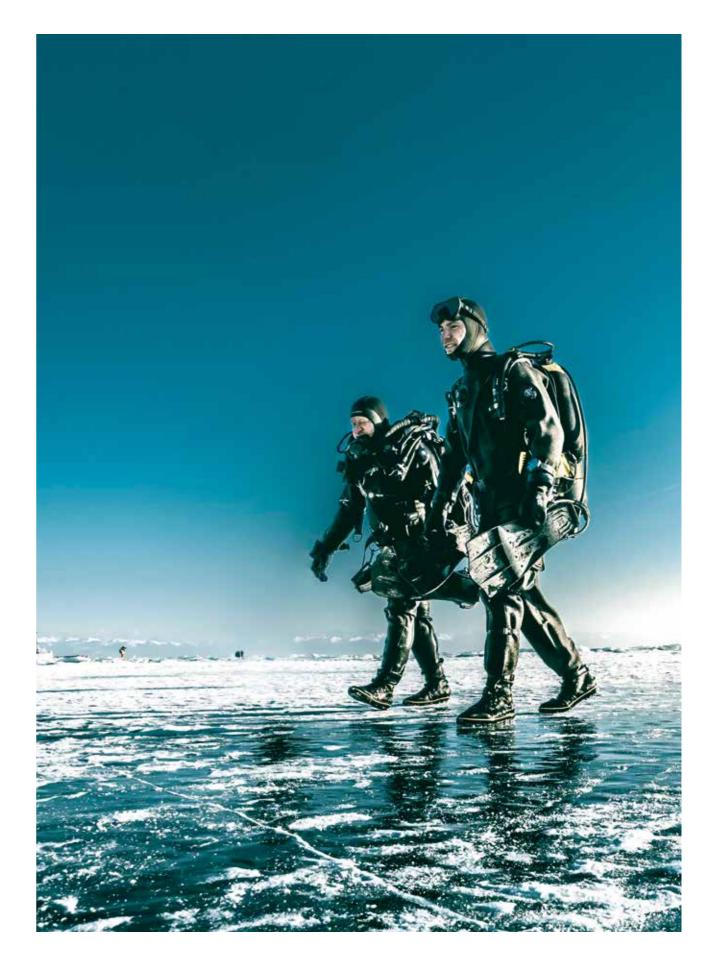



STAINLESS REBREATHER STAND

Art. no. Description 6011-076 Stainless Rebreather Stand

CYLINDER

Art. no.

6011-054

INVERSION KIT

Description

Cylinder Inversion Kit



# REPACKABLE SCRUBBER CARTRIDGE

The scrubber is tested in accordance with the EN14143:2013 with the Poseidon SE7EN rebreather.

Art. no.	Description
6011-069	Repackable Scrubber Cartridge



02. 2		
	Description	SEI
)	Repackable Scrubber Cartridge	2.75675 max

# SCRUBBER CARTRIDGE FILTER

Art. no.	Description
6011-070	Scrubber Cartridge Filter Pair





Description

O2 Sensor (Molex)

POSEIDON

SENSOR

Art. no.

6011-063

SOLID STATE 02

Poseidon brings a quantum leap in

Description

O2 SENSOR

reliability, PO2 accuracy and longevity-

and enhances every aspect of your dive.

Poseidon Solid State O2 Sensor

Digital sensor technology from

# GIGASEPT

Art. no.	Description
0050-003	Gigasept disinfection liquid



# COLORS

DISPLAY GAUNTLET

Art. no.	Description	
0605-001	Display Gauntlet S	
0605-002	Display Gauntlet L	

### MATERIAL:

Ballistic Nylon 1680, YKK Waterproof Zipper, Octupus Velcro.



# CYLINDER QMR SET

The Cylinder Quick Mount Release (QMR) attaches your cylinders even quicker than before and with a perfect fit every time, just as you want them to be. The QMRs are made out of steel and will snap into place on the side of your scrubber canister house.

Art. no.	Description	
0415-002	Cylinder OMR Set	



# TANK BAND STANDARD

COLORS

Black



Description

0000-116 Tank Band Standard



# TANK STRAP & BUCKLE

COLORS

Black



Description 0415-001 Tank Strap & Buckle (Pair L&R)

### MATERIAL:

Stainless Steel.



### **RB HANDLE**

The stainless steel handle is easily mounted in combination with QMR adapter or 11 inch adapter. This will make your rebreather easy to grab and carry.

Art. no.	Description	
6011-019	RB Handle	

MATERIAL:

Stainless Steel

TECHNICAL FEATURE:

Quick mount/dismount



# QMR

The Quick Mount/Release adapter presents the fastest solution to mount and dismount your Poseidon SE7EN to your BCD/Wing.

Art. no.	Description
0005-100	QMR Rebreather BCD

MATERIAL:

Stainless Steel

TECHNICAL FEATURE:

Quick solution for mount/dismount



### 11 INCH ADAPTER

This adapter enables the tightest fit between your Poseidon SE7EN and your BCD/Wing. This is the choice if you don't dismount your unit from the buoyancy device too often.

Art. no.	Description
0000-468	11 inch Adapter Complete

MATERIAL:

Stainless Steel

TECHNICAL FEATURE:

Low profile



## POSEIDON M28



The main features of the M28 include:

- > Powerful graphics thanks to a class leading 2.8" TFT LCD Color Display
- > Highly intuitive user interface with two button control
- > Enhanced SE7EN/MKVI functionality with the M28's Rebreather Management System
- > Dive-By-WireTM enables you to make changes to set-points and gases during dive. Integration is possible with Poseidon Pod Systems, HUD and HP Sensors
- > Dual Deco Algorithm (DCAP and Bülhmann ZHL16C with gradient factors)
- > Real-time GPS Surface Positioning and maps
- > Depth rated to 200M/656 ft

Aı	rt. no.	Description
06	600-200	Poseidon M28 Computer. Incl. Firmware CCR and Firmware Advanced OC. Carrying case, Dust bag, Charging cable and Bungee cord.
06	600-210	Poseidon M28 Computer and CPOD/Solid State Sensor kit

### M28 PROTECTIVE COVER



Art. no.	Description	
0605-000	M28 Protective Cover, Black.	
0605-030	M28 Protective Cover, Red	

### M28 SCREEN PROTECTION



Description 0002-164 M28 Screen Protection

## CPOD INCL. SSO2 AND CABLE



Solid State O2 Sensor features:

- > Absolute oxygen measurement
- > Factory calibrated, no need for user calibration
- > Fast and accurate
- > Low power consumption

Art. no.	Description
6011-064	CPOD, T-Coupling, Poseidon Solid State O2 Sensor
	and Connecting Cable 1 25m/4ft

# POSEIDON M28 CHARGING CABLE



Art. no.	Description	
0005-042	M28 Charging Cable	

# POSEIDON M28 BUNGEE CORD



Art. no.	Description	
0000-938	M28 Bungee Cord	

# O2 SENSOR (MOLEX)



Art. no.	Description	
6010-206	O2 Sensor (Molex)	

# POSEIDON SOLID STATE O2 SENSOR



Art. no.	Description
6011-063	Poseidon Solid State O2 Senso

# CONNECTING CAN CABLE



Art. no.	Description	
0000-690	Connecting CAN cable,	
	1 25 m/4 ft	

# BUS BLOCK $F^2M$



Art. no.	Description	
6011-061*	BUS Block F <sup>2</sup> M	

# BUS BLOCK $\mathrm{M}^2\mathrm{F}$



Art. no.	Description
6011-062*	BUS Block M <sup>2</sup> F

# BLIND PLUG BUS



Art. no.	Description
0605-005	Blind Plug BUS

### T-COUPLING



Art. no.	Description	
6011-059	T-Coupling	

# CPOD



The Poseidon C-POD uses an integrated CAN bus to directly connect to the SE7EN or M28 network to monitor and log the required parameters.

Typical adaptations of the Poseidon C-POD with a M28 includes:

- > Monitor loop PO2 individually or as back up.
- > Deploy the Poseidon mouthpiece and HUD system.
- > Deliver life-saving information on PO2, loop status and calculated decom pression.

Art. no.	Description	
6011-058	CPOD	
,		

# CPOD INCL. T-COUPLING



Art. no.	Description
6011-060	CPOD incl. T-Coupling

# 3RD CELL HOLDER



 Art. no.
 Description

 6011-064
 3rd Cell holder



CYLINDERS & VALVES



# CYLINDER ALU 3LTR 200 BAR

Diameter: 117 mm / 4.61 Inch Length: 440 mm / 17.32 Inch Weight: 3.60 kg / 7.9 lb (US) Test Pressure: 312 Bar / 4,525 PSI Thread Specification: 97/23/EC

Art. no.	Description
0400-105	Cylinder Aluminium 3Ltr 200 Bar DIL
0400-106	Cylinder Aluminium 3Ltr 200 Bar O2

### MATERIAL:

Aluminium.

# TECHNICAL FEATURE:

For rebreather use we recommend: Working Pressure Diluent: 200 Bar / 2,900 PSI. Working Pressure Oxygen: 135 Bar / 2,000 PSI.



# CYLINDER STEEL 3LTR 300 BAR

Diameter: 100 mm / 3.94 Inch Length: 510 mm / 20.08 Inch Weight: 4.80 kg / 10.58 lb (US) Test Pressure: 490 Bar / 7,107 PSI Thread Specification: 97/23/EC

Art. no.	Description
0400-103	Cylinder Steel 3Ltr 300 Bar DIL
0400-119	Cylinder Steel 3Ltr 232 Bar O2

### MATERIAL:

Chromium molybdenum steel.

### TECHNICAL FEATURE:

For rebreather use we recommend: Working Pressure Diluent: 300 Bar / 4,350 PSI. Working Pressure Oxygen: 135 Bar / 2,000 PSI.



# CYLINDER VALVE SINGLE

Art. no.	Description
0410-100**	Cylinder Valve M25x2 Single G5/8" 200 Bar



CYLINDERS & VALVES

# CYLINDER VALVE SINGLE 02

Art. no.	Description
0410-101**	Cylinder Valve M25x2 Single M26x2 150 Bar O2



# CYLINDER VALVE SINGLE 90°

Art. no.	Description
0410-155*	Cylinder Valve M25x2 Single G5/8" 200 Bar 90°



Art. no.	Description
0410-156*	Cylinder Valve M25x2 Single M26x2 200 Bar 90° O2



### CYLINDER VALVE DOUBLE

Art. no.	Description
0410-120**	Cylinder Valve M25x2 Double G5/8" 200 Bar



### INLINE VALVE BLACK

Art. no.	Description
0410-161	Inline Valve 3/4", G5/8" 237 Bar, US with Burst Disk
0410-171	Inline Valve M25x2, G5/8" 232 Bar, EU
0410-173	Inline Valve M25x2, G5/8" 300 Bar, EU



# INLINE VALVE GREEN 02

Art. no.	Description
0410-160	Inline Valve 3/4", G5/8" 237 Bar O2, US with Burst Disk
0410-170	Inline Valve M25x2, M26x2 232 Bar O2, EU
0410-172	Inline Valve M25x2, M26x2 300 Bar O2, EU

### XSTREAM RANGE

### POSEIDON KEEPS INNOVATING

The objective; design the most reliable HP valve in the world. Every engineer knows the benefits of using balls in valve arrangements, since they will never be misplaced and will always find their perfect position. Unfortunately, varying upstream pressures will either push the ball too fiercely into the seat or leave it unsecurely loose, giving unbalanced characteristics.

By inventing the floating seat (which automatically repositions the ball) the increased upstream pressure is balanced equally with increased and counter-acting compression forces from the pressure adjustment spring, maintaining the benefits of having a perfect ball as the sealing element.

The Xstream regulator is also self-balancing, which gives the same high performance irrespective of the pressure in the cylinder. When the seat is moved upwards by the high pressure, the design causes the upper pressure spring to compress and thus exactly self-balance the powers of pressure.

Xstream also has a built in anti freeze protection in its construction. TDA (Thermo Dynamic Antifreeze) ensures that the through-flowing water keeps the ice away, entirely without fluids or extra diaphragms.

The Xstream Deep: The Xstream Deep: rated for use down to 200m and for use with mixtures containing helium (He) and a maximum O2 content of 40%. Colour coded Black on both stages to avoid confusion with other gas mixes. All Xstream hoses are oxygen clean and delivered in a sealed bag and they are available in the following lengths: 70, 90, 150, 215 cm (28, 36, 60, 85 inches).

**Duration:** Colour coded green for oxygen enriched gas on both first and second stage to avoid confusion with other mixes. This regulator fulfills the  $O_4$  requirements for O2 content up to 99,95%  $O_2$ :  $O_2$ -engineered  $O_2$ -compatible,  $O_2$ -clean and  $O_2$ -approved. All Xstream hoses are oxygen clean and delivered in a sealed bag and they are available in the following lengths: 70, 90, 150, 215 cm (28, 36, 60, 85 inches).



# $\mathsf{D_4}$ REQUIREMENTS FOR SAFE OXYGEN USAGE

Xstream fulfils the  $\mathrm{O_4}$  requirements for safe oxygen ( $\mathrm{O_2}\!)$  usage. These are;

O<sub>1</sub> - oxygen engineered

O<sub>2</sub> - oxygen compatible materials

O<sub>3</sub> - cleaned for oxygen use

O<sub>4</sub> - oxygen approved

O<sub>1</sub>, oxygen engineered – constructing a regulator for oxygen use requires special engineering skills. It is not as simple as taking any regulator and changing the materials to be so-called "oxygen compatible". Care must be taken, for example, to minimise the use of polymeric materials, avoid intersecting holes and sharp turns, minimise flow velocity, evaluate heat transfer and optimise it, ensure the product does not produce contaminants during assembly, make cleaning and inspection efficient, etc.

**O**<sub>2</sub>, oxygen compatible materials – the term "oxygen compatible" must not be taken too literally; it is meaningless to refer to a material as being "perfectly oxygen compatible".

It is more a matter of choosing materials according to a set of factors which will result in the lowest possible risk of causing a severe error of any kind. For oxygen use, the variety of materials that come into question is very much limited, since factors such as oxygen index, auto ignition temperature, heat of combustion, toxicity of fumes, risk for particle impact, etc must be considered.

O<sub>3</sub>, oxygen cleaned – is a standard where a certain level of contaminants can be accepted to expose a tolerable risk for ignition. Special methods and detergents must be used to obtain the correct cleanliness level. Poseidon prefers to call it "cleaned for oxygen use", rather than "oxygen cleaned", which can be misleading.

O<sub>4</sub>, oxygen approved – The European Union Directive for Personal Protective Equipment requires that SCUBA regulators must be tested and approved by an independent notified body. Regulators for oxygen use must pass more tests specifically for oxygen, e.g. adiabatic compression shock testing.

### **JETSTREAM**

### THE ULTIMATE IN RELIABILITY

Controlling the power of a massive airflow, astonishingly reaching some 2100 litres/minute is an engineering challenge. The solution to this was to obtain a precision regulation, keeping breathing pressure to within +/- 5 mm.w.c throughout the inhalation cycle, regardless of depth and demand. Called a servo-assisted valve, it works in the same way as does the power steering you may have on your car – it's all about compensation.

Prior to diving, when you pressurize the regulator, the main blue bladder valve is inflated with the interstage pressure, along with all inner volumes including the upstream side of the servo valve.

When this is done a "whooshing" sound of streaming air is heard

The system is then activated. On inhalation, the forces from the inhalation diaphragm easily overcome the light forces to crack open or "tilt" the servovalve and in turn evacuate all inner volumes. The main blue bladder valve then collapses and in turn lets an amount of gas out, corresponding to the actual demand.

This technology ensures that the lightest possible effort can result in an almost limitless amount of gas on inhalation.

All the more astonishing is the fact that Poseidon introduced this technology to the market as far back as 1981.

**The Jetstream:** traditionally popular with technical divers as well as the Swedish and US navies. An easy breathe at any depth, the second stage incorporates a safety valve that allows you to continue to breathe normally

in the unlikely event of abnormally high pressure air being delivered to the second stage. Approved to EN250 cold water standard.



### MATERIAL:

Durable PVC housing with metal mechanism and rubber parts.

### TECHNICAL FEATURES:

- > Use either way up
- > Robust, durable
- > Approved for cold water diving
- > Reliable high performance

### COLLECTION COLORS





19

REGULATORS & GAUGES

# CYKLON EVEN MORE EXPERIENCED THAN YOU...



A regulator must possess a set of functions which are unaffected by the different environments it will see during its lifetime. Examples of these functions include inhalation resistance, exhalation bubble distraction, noise and leak tightness - to name just a few. Different environments such as cylinder pressure, diving attitude, depth, temperature, gas, type of water, the diver can have an effect on these functions.

When a new regulator is released on the market, it has to pass the EN 250 test. This test represents one single environment; the manufacturer may have managed to test perhaps another hundred such situations, which is good but not necessarily enough. Only after years and years of actual use by divers around the world will the manufacturer collect all the information which can guarantee a perfect performance under all circumstances. This of course, takes time...

The Poseidon Cyklon Junior was introduced in 1958. In small steps, it has been gradually improved every year, based on both divers' experiences and technological evolution.

The expression "been there – done that" applies to The Poseidon Cyklon more than any other regulator on the market.

The Cyklon: First launched in 1958, constant improvements have resulted in a really tough, reliable workhorse, and is the choice of many navies around the world. Approved to EN250 cold water standard.

### COLLECTION COLORS

Plastic/Black Metal





"It all began in the end of the fifties. I had an idea of placing the demand valve in an immediate connection to the mouth, instead of behind the neck. My goal was also to place the exhaust valve together with the demand valve and in that way be able to use

INGVAR ELFSTRÖM. FOUNDER OF POSEIDON

### CYKLON 5000



CYKLON X



Robust, high performing, easy to use and cold water ready. The Cyklon just works. Now updated to X for Xstream first stage, and also available for Nitrox and Oxygen.

### SERVO(PILOT) VALVE TECHNOLOGY


To achieve high air flow on demand, the diameter of the supply nozzle in the second stage has to be of sufficient size: however this impacts on other aspects of a regulator's design. This nozzle is covered by a plate or "valve seat", which ensures that gas does not escape when not in use or during exhalation. Force is required to hold the plate in place against the gas pressure - assuming that it is a downstream opening valve seat, as is the case in most conventional regulators. It is the force required to "crack open" the valve - the inhalation effort - which divers want to keep to a minimum.

As mentioned, with the nozzle diameter "set" according to physical laws, therefore the corresponding force to seal the nozzle is also predetermined. These laws mean that to make a high performing and enjoyable regulator, the given factors would result in either a huge diaphragm to obtain the necessary forces, or a high inhalation effort.

One solution that does reduce the inhalation effort is to use a sharp edge against the valve seat - this reduces the force needed to keep the valve closed. This is not satisfactory as it dramatically increases wear. Another option is to use Venturiieffects to fool the regulator diaphragm into believing that there is a greater demand due to local under-pressure zones near the diaphragm. However this too is not satisfactory as the Venturii-effect is dependent on depth and breathing pattern which means that performance will be affected by depth which is never good.

Our solution is Servo technology. It is like power steering in a car. A servo controlled valve is basically made of two valves; one very small and one bigger. The smaller controls the bigger. By having an extremely small valve, with a correspondingly small nozzle, the forces to keep it air-tight and therefore to open it are much smaller. In addition, since the force to keep the bigger valve shut comes from the interstage pressure itself and is controlled via the servovalve, it doesn't require sharp edged seals and it can be greatly increased in respect of outlet area to achieve very high air-flow capacity.





A common misconception regarding the Jetstream servo valve is that since the servo valve is an upstream opening valve, in case of an increased interstage pressure the servo will shut, preventing the main valve from opening.

This is incorrect. The Jetstream second stage is equipped with a safety valve in case a high pressure airflow occurs. This safety valve prevents the airstream from flowing out through the mouthpiece straight into your mouth. Instead, the construction will release the air into the water via the hose. In all cases it is possible to breathe from the second stage.

### What is a breathing curve?

Have you ever thought of how you breathe? When you inhale and exhale you create something called a breathing curve or a loop. A breathing loop is also a way of measuring the performance of a regulator and is measured in Joules per litre (see picture). For example the total work of breathing might be 0,75J/l. The figure shown in charts is normally the sum of inhalation and exhalation with an optimised regulator in a test bench, which means it does not show if the inhalation was extremely high and exhalation extremely low or vice versa.

Some regulators rely on knobs and levers to be manually adjusted. To get optimum performance out of such a regulator as you descend or ascend is extremely hard as there are many parameters to consider. Our idea is that this should work automatically.

At Poseidon we focus on inhalation resistance as breathing out is easy for the human body. The Cyklon achieves this through overall design and the Jetstream and Xstream by servotechnology. The servo valve is unaffected by depth or what pressure it has to work at, as the force required to open it is extremely low. Next time you ask about a regulator's breathing curve ask them about inhalation resistance and if the regulator adjusts this automatically so that you don't end up being the regulator.

REGULATORS & GAUGES REGULATORS & GAUGES

### POSEIDON XSTREAM

THE BENCHMARK FOR HIGH PERFORMANCE. WHETHER YOU DIVE WITH AIR, TRIMIX OR OXYGEN, THE XSTREAM OUTPERFORMS ALL OTHER REGULATORS. CERTIFIED TO 200M. AS USED BY THE US NAVY.

### KEY PERFORMANCE FEATURES:

- > Side purge prevents current-induced free flow
- > Side vent diverts bubbles from face
- > EAN 40 ready and compatible
- > Works perfectly either way up, or from left or right side
- > Only regulator certified for 200 m / 656 ft
- > No environmental sealing required for cold water



Art. no Product Name

0100-010 Xstream Black, for air, nitrox 50% and trimix



Art. no Product Name

0100-000 Xstream Deep MK3, for air, nitrox 50% and trimix



Art. no Product Name

0100-001\* Xstream Duration M26 (EU), Green, for oxygen. 70 cm hose.
0100-007 Xstream Duration G5/8" (Int), Green, for oxygen. 70 cm hose.

### **JETSTREAM**



Art. no

0100-005 Jetstream Mk3, Black

**Product Name** 

### CYKLON 5000



Art. no Product Name

3950 Cyklon 5000, Black with hose 70 cm



Art. no Product Name

3950 M Cyklon Metal with hose 70 cm



rt. no Product Name

3950 10	Cyklon 5000, fixed yoke with hose 70 cm
3950 10M	Cvklon Metal, fixed voke with hose 70 cm

# CYKLON X

For 60 years the Cyklon regulator has earned its stellar reputation for durability. Cyklon X now gets the cold water and 1st stage performance from Xstream's patented technology. This also makes it Nitrox EAN 40 ready and we can deliver it oxygen cleaned on special order.

Choose between the lighter standard 2:nd stage or the even more durable Cyklon X Metal 2:nd stage. The Cyklon X is a combination that will truly last for a lifetime of diving.



Description

0100-100 Cyklon X with hose 70 cm



Art. no. Description

0100-101 Cyklon X Metal with hose 70 cm



### REGULATORS & GAUGES

### OCTOPUS



XSTREAM OCTOPUS WITH 90 CM LP-HOSE

7411.1101	Boomption	
0100-003	Xstream Octopus	
0100-013	Xstream Black Octopus	



JETSTREAM OCTOPUS WITH 90 CM LP-HOSE

Art. no.	Description	
0100-006	Jetstream Octonus	



CYKLON OCTOPUS WITH 90 CM LP-HOSE

Art. no.	Description
2981	Cyklon Octopus
2981 M	Cyklon Metal Octopus

Double Console in Yellow

### GAUGES


The gauges come in two different colors, the traditional yellow dial and the new with a black dial. Both versions come with either bar or psi and they are also available as double console with a depth meter.

### MODEL:


Cirrus Pressure Gauge with Hose



Manometer Mini BAR











Compass Cirrus

Pressure Gauge in Black



TECHNICAL FEATURES:

Cirrus Pressure Gauge with Hose This 300 bar (4350 psi) pressure gauge is a small model that will not be in the way during the dive. Made of robust metal and packed with Poseidon's 300 bar kevlar reinforced


Also available with PSI scale.

Pressure Gauge in Black Our pressure gauge in a new design, with black display and fluorescent numbers. Pressure gauge shows both BAR and PSI. Delivered with a

Double Console in Black

80 cm HP hose.

Our double console in a new design, with black display and fluorescent numbers. Pressure gauge shows both BAR and PSI. Comes with a 80 cm HP hose.

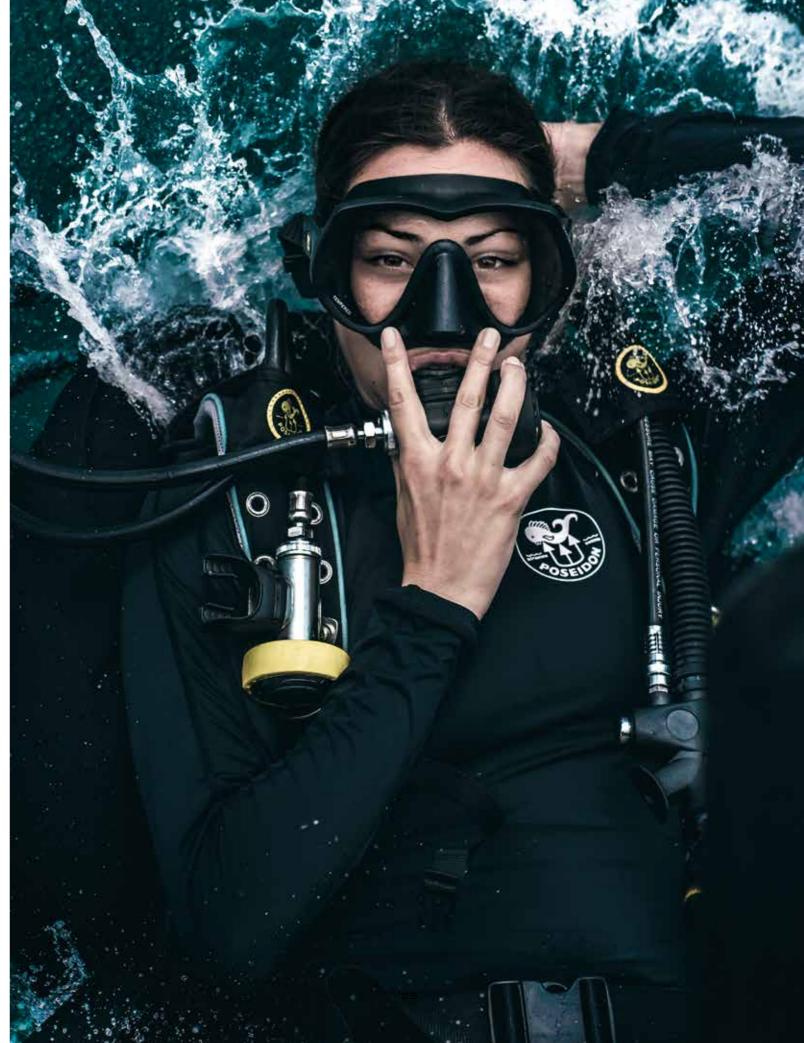

### Art. no. Description 7929 Pressure gauge Cirrus w hose BAR

. 020	. rootal o gaage our ao n rioto Er a r
0600-001	Double Console Cirrus, Black
0600-000	Pressure Gauge Cirrus, Black
8671	Double Console Cirrus w hose BAR, Yellow
001-95	Manometer Mini BAR
002-06	Manometer Mini PSI
8672*	Compass Cirrus Cover + Holster

REGULATORS & GAUGES REGULATORS & GAUGES

### REGULATOR KIT XSTREAM BLACK



### REGULATOR KIT XSTREAM BLACK

- > 1st Stage Xstream Black Regulator
- > Xstream Octopus Black/Yellow incl. Hose
- > Xstream Black/Black incl. Hose
- > Pressure Gauge Yellow with Hose
- > Neckstrap
- > User guide

Art. no	Product Name
0100-590	Xstream Black w. Octo & Ye. PSG Bar
0100-591	Xstream Black w Octo & Ye. PSG Psi

### REGULATOR KIT XSTREAM DEEP



### REGULATOR KIT XSTREAM DEEP

- > 1st Stage Xstream Regulator
- > Xstream Octopus Yellow incl. Hose
- > Xstream Deep MK3 incl. Hose
- > Neckstrap
- > With Pressure Gauge Black incl. Hose
- > User guide

### Art. no Product Name

0100-560	Xstream Deep w Octo & Black PSG
0100-580	Xstream Deep w Octopus
100-578	Yetraam Cold Water Double kit

incl. 2 pcs 1st stage, 2 pcs 2nd stage, LT hose 60 & 215 cm

### REGULATOR KIT XSTREAM DURATION



# REGULATOR KIT XSTREAM DURATION

- > 1 st Stage Xstream Duration Regulator
- > Xstream Octopus Yellow incl. Hose
- > Xstream Duration incl. Hose
- > Neckstrap
- > With Pressure Gauge Black incl. Hose
- > User guide

### Art. no Product Name

0100-514 Xstream Duration M26 (EU), Green, for oxygen. With Octopus. Incl. LP-hose.

0100-518 Xstream Duration G5/8" (Int), Green, for oxygen. With Octopus. Incl. LP-hose.

### REGULATOR KIT CYKLON X



### REGULATOR KIT CYKLON X

- > 1st Stage Xstream Regulator
- > Cyklon Octopus Yellow incl. Hose
- > Cyklon Black incl. Hose
- > With or without Pressure Gauge Black incl. Hose
- > User guide

Art. no. Description

0100-535 Cyklon X with Octopus

0100-540 Cyklon X with Octopus incl. PSG Black

# REGULATOR KIT CYKLON 5000



### REGULATOR KIT CYKLON 5000

- > 1st Stage Cyklon Regulator
- > Cyklon Octopus Yellow incl. Hose
- > Cyklon Black incl. Hose
- > With or without Pressure Gauge Black incl. Hose
- > User guide

Art. no. Description

0100-545 Single Kit Cyklon 5000

0100-550 Single Kit Cyklon 5000 incl. PSG Black

REGULATORS & GAUGES REGULATORS & GAUGES



# ATMOSPHERE



It is approved for cold water, and in combination with the mask features a unique highly effective de-fogging system which keeps the field of vision clear even at water temperatures close or equal to freezing point.

The mask has an anti-distortion visor, with frosted sides to prevent reflections.

The mask is an over pressure mask which reduces the risk of contaminated water entering the mask during a dive.

The mask can of course be used in all altitudes without free-flowing.

Any standard communication system will fit the Poseidon mask.

The mask has external buoyancy compensating weights which can also be used for mounting torches, video-cameras etc. Developed initially for fighter plane pilots the mask was designed to be worn for up to six hours when the plane flies through chemical or biological war zones.

# COLLECTION COLORS

# Black



Art. no.	Description			
4960-M-BK	Atmosphere M Complete			
4900-M-BK	Atmosphere M w. 2:nd stage			

# TECHNICAL FEATURES:

For optimum performance, the Atmopshere should be connected to an Xstream 1st stage.

- > Highly effective de-fogging system
- > Anti-distortion visor
- > Prepared for communication system

WEIGHT FOR ATMOSPHERE



Art. no.	Description
0005-195*	Weight for Atmosphere, pair

### POSEIDON FACT ATMOSPHERE

Poseidon is the only manufacturer with mouthpiece regulators approved for cold water service by US Navy. For details go to http://www.supsalv.org/pdf/ANU.pdf

# ATMOSPHERE PACKAGE

- > Regulator with 70 cm hose
- > Warranty card
- > User guide

### USERS

- > US Navy
- > Italian police
- > Technical divers

### WHO SHOULD BUY

Sport divers

Under water photographers

### POSEIDON FACT JETSTREAM P.P.

Jetstream P.P. fulfils the EU PPE 89/686/ EEC directive and is approved according to the cold water standard EN 250:2000. The regulator has breathing performance thatby far exceeds the demands of 3J/l at 50 m depth with a cylinder pressure of

### ATMOSPHERE PACKAGE

- > Full face mask
- > Second stage with 70 cm hose
- > Warranty card
- > User guide
- > Poseidon neck strap
- > Name badge holders

### WHO SHOULD BUY

Cold water divers Public safety divers Military Sport divers Technical divers

REGULATORS & GAUGES REGULATORS & GAUGES



### POSEIDON EBS MKII

The Poseidon EBS (Emergency Breathing System) is a Category A Escape device Compressed Air System.

### MATERIAL:

Cylinder capacity 0.3 liter, 200 bar/2900 psi. 60 litre compressed air.

Xstream EBS mkll 1st stage regulator.

Low Pressure Hose Flexible 24".

Cyklon EBS 2nd stage regulator.

### TECHNICAL FEATURES:

The EBS is complies with EN250 ColdWater and CAP1034.

## COLORS

Yellow



Art. no.	Description		
0140-010	Poseidon EBS Yellow		



FILLING ADAPTER M26-G5/8"02-CLEAN

Art. no.	Description
0005-008*	Filling Adapter M26-G5/8" O2-Clean



# MIFLEX HOSE POLYURETHANE

Art. no.	Description
0130-004	LP Hose Polyurethane 9/16-18, 90cm
0130-032	LP Hose DIL 9/16-18, 20cm
0130-033	LP Hose O2 9/16-18, 20cm
0130-034	LP Hose DIL 9/16-18, 20cm w. 90 angle
0130-035	LP Hose O2 9/16-18, 20cm w. 90 angle
0132-007	LP Hose DIL 3/8M-9/16"F, 38cm
0132-008	LP Hose O2 3/8M-9/16"F, 70cm



# LP-HOSE WING INFLATOR BO CM

Art. no.	Description		
0130-016	LP-Hose Wing Inflator Length 80 cm		



LP-HOSE O2 WING INFLATOR 65 CM

Art. no.	Description
0130-026*	LP-Hose O2 Wing Inflator Length 65 cm

30



# LP-HOSE CYKLON UNF 3/8"

Art. no.	Description
2946	LP-Hose Cyklon 70 cm
2947	LP-Hose Cyklon 90 cm
2948*	LP-Hose Cyklon 120 cm
3146*	LP-Hose Cyklon 150 cm
3147*	LP-Hose Cyklon 215 cm



# LP-HOSE MK3 9/16-18

Art. no.	Description
0130-000	LP-Hose Mk3 9/16-18 Length 70 cm
0130-001*	LP-Hose Mk3 9/16-18 Length 70 cm O2
0130-002	LP-Hose Mk3 9/16-18 Length 90 cm
0130-003*	LP-Hose Mk3 9/16-18 Length 90 cm O2
0130-006	LP-Hose Mk3 9/16-18 Length 110 cm
0130-007*	LP-Hose Mk3 9/16-18 Length 110 cm O2
0130-008	LP-Hose Mk3 9/16-18 Length 150 cm
0130-009*	LP-Hose Mk3 9/16-18 Length 150 cm O2
0130-010	LP-Hose Mk3 9/16-18 Length 210 cm
0130-011*	LP-Hose Mk3 9/16-18 Length 210 cm O2
0130-048	LP-Hose Mk3 9/16-18 Length 60 cm



LP-HOSE MK3 9/16-18 BLACK

Art. no.	Description
0130-036	LP-Hose Mk3 9/16-18 Black, Length 70 cm
0130-037	LP-Hose Mk3 9/16-18 Black, Length 90 cm

# POSEIDON XSTREAM - AVAILABLE COLORS FOR HOUSING AND COVER

MORE COLORS NOW AVAILABLE FOR THE XSTREAM HOUSING AND COVER.
CHOOSE WHITE, GREY OR THE STANDARD BLACK FOR THE HOUSING AND PINK,
TURQUOISE, WHITE AND GREY FOR THE COVER.
TOGETHER WITH THE EXISTING BLACK, YELLOW AND GREEN COVERS THERE
ARE A LOT OF CHOICES.

CONFIGURE YOUR OWN XSTREAM ONLINE, JUST THE WAY YOU WANT IT.



Regulators						
General	Xstream Deep	Xstream Duration	Jetstream Mk3	Cyklon 5000	Cyklon Metal	Atmosphere FFM
Item no	0100-000	0100-001 M26 0100-007 G5/8"	0100-005	3950	3950 M	4900-M-BK
Approved to depth (m/f)	200/656 (gas dep)	200/656 (gas dep)	50/165	50/165	50/165	50/165
IP (bar/psi)	8.5/123	8.5/123	9.5/138	12/174	12/174	8.5/123
Air	√	V	V	√	√	V
Nitrox EAN 40%	√	√	n/a	n/a	n/a	n/a
Oxygen 99.95%	n/a	√	n/a	n/a	n/a	n/a
Trimix	V	n/a	n/a	n/a	n/a	n/a
Working pressure 300 bar	V	√	√	√	V	√
Anti-Freeze protection	√	√	**	**	**	**
O-rings	Nitril/EPDM	Viton/EPDM	Nitril	Nitril	Nitril	Nitril
US Navy Tested	V	n/a	√	√	V	n/a
Oxygen approved (EN738-1)	n/a	V	n/a	n/a	n/a	n/a
NORSOK Tested	√	√	n/a	n/a	n/a	n/a
EN250 approved (cold water)	V	√		√	√	V
CE Cold water approved	√	√	√	√	V	√

2nd Stage						
Item no	0120-000	0120-001	0120-005	3354	3354 M	4915-BK
Colour	Black	Green	Black	Black	Metal	Black
Material	ASA/TPU	ASA/TPU	ASA	ASA	ASA	ASA
	Stainless steel					
	Brass	Brass	Brass	Brass	Brass	Brass
Weight (g/lb)	152/0,33	152/0,33	190/0,42	200/0,44	250/0,55	190/0,42
Volume (ml/cuin)	49,5/3,0	49,5/3,0	80/4,88	60/3,66	60/3,66	80/4,88
Technique	Upstream	Upstream	Upstream	Downstream	Downstream	Upstream
Flowrate (I/cuft permin)	2150/76	2150/76	1800/63	1250/44	1250/44	1800/63
Oxygen cleaned	n/a	√	n/a	n/a	n/a	n/a
Servoassisted	√	√	√	n/a	n/a	√
Safety valve	√	√	√	n/a	n/a	√
Swiveling	√	√	√	√	√	√
Automatic Venturi assist	√	√	√	√	√	√
Automatic Inhalation control	√	√	√	√	√	√
Gascoded cover	√	√	n/a	n/a	n/a	n/a
Dismountable w/o tools	√	√	n/a	n/a	n/a	n/a
Non keyed (no up or down)	√	√	√	√	√	fixed
Anatomic Mouthpiece	√	√	√	√	√	n/a
Push button on side	√	√	√	√	√	√
Positive pressure	n/a	n/a	n/a	n/a	n/a	√

1st Stage	v	V		0 11 5000	0.11 14.1.	
Product name	Xstream Deep	Xstream Duration	Jetstream Mk3	Cyklon 5000	Cyklon Metal	Atmosphere Complet
Item no	0110-000	0110-001 M26 0110-003 G5/8"	0110-000	3720	3720	0110-000
Colour	Black	Green	Black	Metal	Metal	Metal
Technique	Rolling diaph.	Rolling diaph.	Diaphragm	Diaphragm	Diaphragm	Rolling diaph.
Material	Chrome/brass	Chrome/brass	Chrome/brass	Chrome/brass	Chrome/brass	Chrome/brass
/alve technique	Spheric	Spheric	Piston	Piston	Piston	Spheric
Wheel mount	Side	Side	Side	Side	Side	Side
Flowrate (I/cuft per min)	5500/194	5500/194	5500/194	5100/180	5100/180	5500/194
Oxygen cleaned DIN 5/8" Connection	n/a	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
DIN 5/8" Connection	√	√	√	√	√	√
EN144-3 Connection	n/a	√	n/a	n/a	n/a	n/a
Separate Yoke	**	**	**	**	**	**
Zytel HP seat	√	√	√	n/a	n/a	n/a
Safety valve	√		√		√	√
Thermodynamic anti-freeze prot.	√	√	n/a	n/a	n/a	n/a
Hose						
Hose length	70 cm/28 in	*	70 cm/28 in	70 cm/28 in	70 cm/28 in	70 cm/28 in
Cordreinforced EPDM	√	√	√	√	√	√
Inspection port	√	√	√	√	√	√
>100 bar burst pressure	√	√	√	√	√	√
>1000 N Tensile strength	√	√	√	√	√	√
Oxygen cleaned	n/a	√	n/a	n/a	n/a	n/a
Accessories						
Octopus	0100-003	n/a	0100-006	2981	2981 M	0100-003, 0100-006
Separate Yoke	2920	2920	2920	2920	2920	2920
Anti freeze cap	n/a	n/a	1286	1286	1286	n/a
Hose 70 cm/28 inch	0130-000	0130-001	0130-000	2946	2946	0130-000
Hose 90 cm/35 inch	0130-002	0130-003	0130-002	2947	2947	0130-002
Hose 150 cm/59 inch	0130-008	0130-009	0130-008	3146	3146	0130-008
Hose 215 cm/85 inch	0130-010	0130-011	0130-010	3147	3147	0130-010
Neckstrap	4540	4540	n/a	n/a	n/a	4540

32

### GLOSSARY OF TERMS USED

Balanced – this means that the regulated pressure is independent from the upstream pressure, e.g. IP independent from cylinder pressure, or breathing pressure independent from IP. The conventional way to obtain this is to arrange the valve in such a way that the upstream pressure either: acts only on surfaces perpendicular to the opening and closing direction, thereby having no effect on opening and closing forces; or the upstream pressure leads through the valve to an opposite surface of equal area, leading to an automatic equalisation (balancing) of forces in the opening and closing direction.

Either way, it leads to a more stable performance and higher regulating precision.

**Upstream valve vs. downstream valve** – an upstream valve opens in a direction opposite of the flow direction which will be established when the valve opens.

A downstream opens in the same direction as the subsequent flow. An upstream valve will seal tighter and tighter with an increasing upstream pressure, while a downstream will open when upstream pressure reaches a certain threshold pressure.

SCUBA regulators with upstream valves must have something acting as a pressure relief valve somewhere in the line, to ensure that explosions are not caused in case of an excessive pressure. Downstream valves will open spontaneously, but if used, for example, in 2nd stages, will be more prone to start free-flowing under the same circumstances.

p/v loop, breathing diagram - A p/v loop is a way to visualise a regulator's breathing performance by plotting the breathing pressure over the displaced volume. Most often, the breathing starts with an inhalation to the right at the x-axis, and the inhalation forms a graph ideally close to the x-axis. When exhalation starts, the graph plotter turns and goes back again on the positive side of the x-axis until the inhaled volume has again been exhaled. This then forms a "pressure/ volume loop". The x-axis intersects with the y-axis exactly at the actual pressure at depth, and can be said to be the target regulator pressure. If both the inhalation and exhalation curve did not deviate from the target pressure whatsoever, we would have a perfect regulator, with no inhalation- or exhalation-resistance.

Norsok U-101 – Since the EN 250 standard only statesdynamic performance testing to a maximum depth of 50m, and accordingly requires a maximum approved diving limit to 50m, it cannot be used for type approving regulators capable of more. The Norwegian Off-Shore industry has established standards similar to the EN 250 which describes testing down to 400m. This standard was accepted by the notified body to be used to tested the first ever Open Circuit SCUBA regulator to be approved for use down to 200m – the Xstream. The standard can be viewed at: http://www.standard.no/pronorm-2/data/f/0/01/49/1\_10704\_0/U-101-N.pdf



BCDS & WINGS BCDS & WINGS







Art. no.	Description
0337-032	Rebreather BCD Red XS
0337-033	Rebreather BCD Red S
0337-034	Rebreather BCD Red M
0337-036	Rebreather BCD Red L
0337-037	Rebreather BCD Red XL
0337-062	Rebreather BCD Black XS
0337-063	Rebreather BCD Black S
0337-064	Rebreather BCD Black M
0337-066	Rebreather BCD Black L

0337-067 Rebreather BCD Black XL

### REBREATHER BCD

The rebreather BCD is the first of its kind and features include integrated exchangeable lungs, weight system and the Poseidon individual patch system. The rebreather BCD is constructed to the highest quality and durability using ballistic nylon, YKK zippers and hand crafted detailing. Available in 4 colors.

- > Integrated exchangeable lungs
- > Weight system
- > Individual patch system

### MATERIAL:

Premium black version in Nylon 1680. Color versions in red, made in Cordura 1000. YKK Waterproof Zippers. Inflator with stainless steel mechanism.

### TECHNICAL FEATURES:

Integrated counter lungs, Integrated weightpockets, Case for crotch strap, Velcro for patches or gauntlet.

### WAIST RANGE

Slze	S	М	L	XL
inch	30~36	33~39	37~43	40~47
cm	76,5~91,5	84~99	94~109	101,5~119,5

### POPULAR ACCESSORIES:

Art. no.	Name	Description
0605-001/002	Display Gauntlet	Keeps your display in place on your wrist
0005-100	QMR	Quickly attached MK VI to BCD or Harness
0650-031/032/033	Wing Man	To use for your bailout bottle

### THE POSEIDON WING AND BACKPLATE

The Wing & Backplate is tailored to fit the POSEIDON SE7EN but is also an excellent choice for SCUBA diving purposes.

The Poseidon Wing & Harness have been designed to sustain good buoyancy and fit. Therefore they are the preferable choice of buoyancy device.

Made in Ballistic nylon with an integrated deflate system and custom made back plate.

The webbing and buckle system is adapted from the Poseidon platform.

The black aluminum backplate is covered in Nylon for protection and a higher comfort. The four D-rings will make it easy to attach your bailout tank/-s or anyother equipment you would like to take along on your dive.

### COLLECTION COLORS

# Black



Art. no.	Description
0336-164	Harness w. backplate
0338-060	Poseidon Wing WRB

## TECHNICAL FEATURES:

- > Self retracting bladder
- > Three dump valves
- > Nylon covered black aluminum backplate
- > Maximum buoyancy is 150 N which is reached within 5-8 seconds
- > Dry weight 1,8 kg



### MATERIAL:

Nylon 1680, Nylon covered black aluminum backplate



# ORIGO BCD

The Origo BCD is constructed to the highest quality and durability using ballistic nylon, YKK zippers and hand crafted detailing.

### MATERIAL:

Premium black or red version in Nylon 1680. YKK Waterproof Zippers. Inflator with stainless steel mechanism.

# TECHNICAL FEATURES:

Integrated weightpockets. Case for crotch strap, Velcro for patches or gauntlet.

### COLLECTION COLORS

Art. no.	Description
0337-433	Origo BCD Red S
0337-434	Origo BCD Red M
0337-436	Origo BCD Red L
0337-437	Origo BCD Red XL
0337-463	Origo BCD Black S
0337-464	Origo BCD Black M
0337-466	Origo BCD Black L
0337-467	Origo BCD Black XL



BCDS & WINGS BCDS & WINGS



### ONE WING & ONE HARNESS

Poseidon's single tank wing is now available in the ONE design. Featured in 2 colors and made in Cordura™ 1000. Designed for beginners and for more experienced divers, the One Wing 50 is a sport wing with excellent volume increase and superior bladder deflation capabilities. When deflated, the ClamRetract system helps to reduce size and drag to the minimum. Four dump valves and an inflator with a stainless steel mechanism ensure inflation and deflation is always controlled and safe; and the shape of the bladder compensates for the weight of the tank when submerged and gives you freedom to move in any direction. The narrow air passage behind the neck is designed not to impede head movement or foul regulators and hoses

The One Wing is made for equipment with a negative weight in water that does not exceed 19 kg (41.6 lbs) and has a lifting capacity of 225 N. It comes with a double, non-flex tank-band tank attachment system and can also be equipped with integrated weight pockets, accessory pockets, metal back plate, pinbolt kit and D-rings.

The standard size has a waist belt with three rows of 40 cc holes; and the large size has six rows.



## COLLECTION COLORS

Black



Art. no.	Description	
0335-030	One Wing 50 Red	
0335-060	One Wing 50 Black	

### FEATURES ONE WING:

Sport wing, Three dump valves, Inflator with a mechanism in stainless steel, Non-flex tankband, ClamRetract system.





### COLLECTION COLORS

Black

Art. no.	Description
0336-034**	One Harness Red Standard
0336-036**	One Harness Red Large
0336-064	One Harness Black Standard
0336-066	One Harness Black Large
0336-066	One Harness Black Stand

### FEATURES ONE HARNESS:

Ergonomic harness, 40 cc system, Fits most sizes, Available in Standard and Large.

### POSEIDON ONE HARNESS

Add system products



WEIGHT POCKET M INCL. BOLT KIT

Art. no.	Description
000-47	Weight Pocket M



ONE WING

Art. no.	Description
0335-030	One Wing 50 Red
0335-060	One Wing 50 Black



**BOLT KIT** BESEA BUTTERFLY

Art. no.	Description
000-93*	Bolt Kit Besea Butterfly



COMBINATION WEIGHT POCKET INCL. BOLT KIT

Art. no.	Description	
0353-042	Combination Weight Pocket	





BACKPLATE STEEL

Art. no.	Description
0000-256*	Backplate Steel Besea



D-RING KIT BESEA PREBENT

Art. no.	Description
001-91*	D-Ring Kit Besea Prebent



WEIGHT POCKET SYSTEM

Art. no.	Description
0355-066	Weight Pocket System



## TRIM WEIGHT POCKET

Weight pocket to be used to modify the diver's trim. Easily mounted on the tank

### COLORS

Black



Art. no.	Description
0350-010	Trim Weight Pocket

### MATERIAL:

1680D Nylon in black

### TECHNICAL FEATURES:

Fits 2kg/4lbs



# WEIGHT POCKET M INCL. BOLT KIT

Quick release when you need it. Removable inner pocket for easy weight packing and removal. Pairs perfectly with Poseidon's One Harness and Rebreather Harness and Plate System.

### COLORS

Black

DIACK	

Art. no.	Description
000-47	Weight Pocket M

### MATERIAL:

Cordura with stainless bolt kit and plastic washer and release handle.

### TECHNICAL FEATURES:

Symmetrical design enables placement on either left or right side. Quick-release mechanism Removable inner pocket holds 4.5kg /10lbs. Bolt kit included.



# COMBINATION WEIGHT POCKET INCL. BOLT KIT

The Black Line Combination Weight Pocket gives you everything you need in a larger weight pocket, combined with the added flexibility of using the pocket for accessories. Quick release when you need it. Removable inner pocket for easy weight packing and removal. Symmetrical design enables right or left placement. Pairs perfectly with Poseidon's One Harness and Rebreather Harness and Plate System.

### COLORS

Black



Description
Combination Weight Pocket

### MATERIAL:

Cordura with stainless bolt kit and plastic washer and release handle.

### TECHNICAL FEATURES:

Symmetrical design enables placement on either left or right side. Quick-release mechanism Removable inner pocket holds 5kg /12lbs. Bolt kit included



### BUCKLE INCL. HOOK RELEASE HOOK

Art. no.	Description
3001*	Buckle stainless steel
	50 mm incl. hook



Art. no.	Description	
3012*	Release hook 50 mm	



# WEIGHT STOPPING **BUCKLE STEEL**

Art. no.	Description
3253 10*	Weight Stoping Buckle Stainless steel 50 mm



# WEIGHT POCKET SYSTEM

The Black Line Weight Pocket System gives you the ultimate flexibility of fit. Quick release when you need it. Removable inner pocket for easy weight packing and removal. Symmetrical design enables right or left placement. Pairs perfectly with Poseidon's One Harness and Rebreather Harness and Plate System. Also fits with standard size weight belts.

### COLORS





Art. no.	Description
0355-066	Weight Pocket Syste

### MATERIAL:

Cordura with stainless eyelets and bolt kit. Release handle in plastic.

### TECHNICAL FEATURES:

Symmetrical design enables placement on either left or right side. Fits standard size weight belt as well as Poseidon BCDs. Quick-release mechanism Removable inner pocket holds 4.5kg /10lbs. Bolt kit included.



# WEIGHT BELT MEDIUM

Comfortable padded weight belt with buckle. Padding includes a soft anti slip down material for maximum comfort. Including stainless buckle.

### COLORS

Black



Art. no.	Description
350-765*	Weight Belt Medium

### MATERIAL:

Ballistic cordura, PP webbing, stainless eyelets, YKK #10 zipper and plastic buckle. Stainless steel buckle.

### TECHNICAL FEATURES:

Dual zip locked pockets with 2 + 2 internal lead compartments with a max capability of 10kg (2,5kg per compartment). 2 plastic D-rings for accessories.



# WEIGHT BELT LARGE

Comfortable padded weight belt with buckle. Padding includes a soft anti slip down material for maximum comfort. Including stainless buckle.

### COLORS

Black



Art. no.	Description
0350-767*	Weight Belt Large

### MATERIAL:

Ballistic cordura, PP webbing, stainless eyelets, YKK #10 zipper and plastic buckle. Stainless steel buckle.

### TECHNICAL FEATURES:

Dual zip locked pockets with 3 + 3 internal lead compartments with a max capabilityof 16kg (2,5kg per compartment). 2 plastic D-rings for accessories.



# WEIGHT STOPPING **BUCKLE PLASTIC**

Art. no.	Description
0310-145*	Weight Stoping Buckle Plastic 50 mm



# WEIGHT BELT 50MM

Art. no.	Description
2964	Weight Belt 50 mm

39

# SUITS & ACCESSORIES

# RASHGUARD TOP








# COLLECTION COLORS







Art. no.	Description
0250-532	Rashguard Top, Male Red XS
0250-533	Rashguard Top, Male Red S
0250-534	Rashguard Top, Male Red M
0250-536	Rashguard Top, Male Red L
0250-537	Rashguard Top, Male Red XL
0250-582	Rashguard Top, Male Grey XS
0250-583	Rashguard Top, Male Grey S
0250-584	Rashguard Top, Male Grey M
0250-586	Rashguard Top, Male Grey L
0250-587	Rashguard Top, Male Grey XL
0250-562	Rashguard Top, Male Black XS
0250-563	Rashguard Top, Male Black S
0250-564	Rashguard Top, Male Black M
0250-566	Rashguard Top, Male Black L
0250-567	Rashguard Top, Male Black XL
0250-632	Rashguard Top, Female Red XS
0250-633	Rashguard Top, Female Red S
0250-634	Rashguard Top, Female Red M
0250-636	Rashguard Top, Female Red L
0250-637	Rashguard Top, Female Red XL
0250-682	Rashguard Top, Female Grey XS
0250-683	Rashguard Top, Female Grey S
0250-684	Rashguard Top, Female Grey M
0250-686	Rashguard Top, Female Grey L
0250-687	Rashguard Top, Female Grey XL
0250-662	Rashguard Top, Female Black XS
0250-663	Rashguard Top, Female Black S
0250-664	Rashguard Top, Female Black M
0250-666	Rashguard Top, Female Black L
0250-667	Rashguard Top, Female Black XL

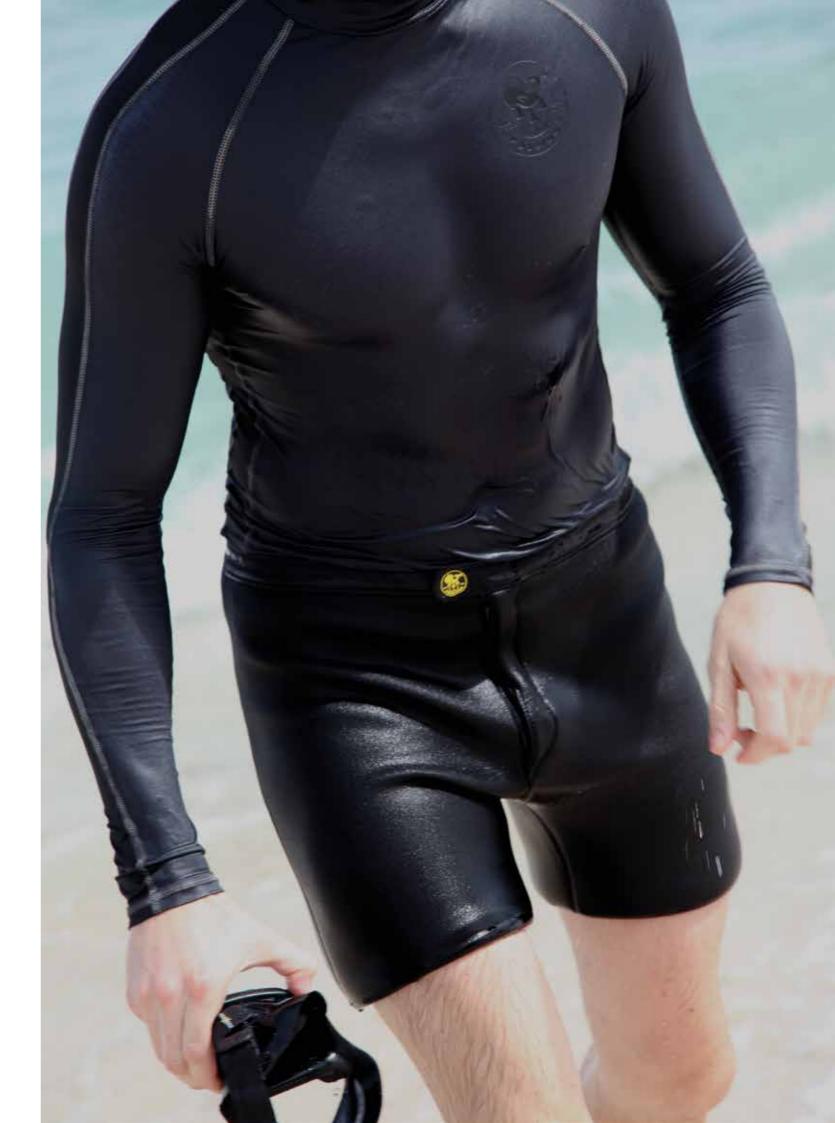

# ONE SHOE

Why you will love this product: Supratex neoprene for comfort and durability. Rear YKK zipper for easy access. Awesome for boards, kayaks and other watersports.

### COLLECTION COLORS














# MATERIAL:

Made in Supratex with rubber sole, YKK Waterproof Zipper and elastic bungy cord.

# TECHNICAL FEATURES:

Step in shoe with zipper in the back, elastic bungy cord to keep the shoe slim around the divers foot, high durability sole.

Art. no.	Product Name
0251-8336	One Shoe Red/BK Toe Sz 36
0251-8337	One Shoe Red/BK Toe Sz 37
0251-8338	One Shoe Red/BK Toe Sz 38
0251-8339	One Shoe Red/BK Toe Sz 39
0251-8340	One Shoe Red/BK Toe Sz 40
0251-8341	One Shoe Red/BK Toe Sz 41
0251-8342	One Shoe Red/BK Toe Sz 42
0251-8343	One Shoe Red/BK Toe Sz 43
0251-8344	One Shoe Red/BK Toe Sz 44
0251-8345	One Shoe Red/BK Toe Sz 45
0251-8346	One Shoe Red/BK Toe Sz 46
0251-8347	One Shoe Red/BK Toe Sz 47
0251-8636	One Shoe Black/BK Toe Sz 36
0251-8637	One Shoe Black/BK Toe Sz 37
0251-8638	One Shoe Black/BK Toe Sz 38
0251-8639	One Shoe Black/BK Toe Sz 39
0251-8640	One Shoe Black/BK Toe Sz 40
0251-8641	One Shoe Black/BK Toe Sz 41
0251-8642	One Shoe Black/BK Toe Sz 42
0251-8643	One Shoe Black/BK Toe Sz 43
0251-8644	One Shoe Black/BK Toe Sz 44
0251-8645	One Shoe Black/BK Toe Sz 45
0251-8646	One Shoe Black/BK Toe Sz 45
	One Shoe Black/BK Toe Sz 47
0251-8647	OHE SHOE DIACK DR 108 32 47
0251-9236	One Shoe Blue/WT Toe Sz 36
0251-9230	One Shoe Blue/WT Toe Sz 37
0251-9237	One Shoe Blue/WT Toe Sz 38
0251-9236	One Shoe Blue/WT Toe Sz 39
0251-9239	One Shoe Blue/WT Toe Sz 40
0251-9241	One Shoe Blue/WT Toe Sz 41
0251-9242	One Shoe Blue/WT Toe Sz 42
0251-9243	One Shoe Blue/WT Toe Sz 43
0251-9244	One Shoe Blue/WT Toe Sz 44
0251-9245	One Shoe Blue/WT Toe Sz 45
0251-9246	One Shoe Blue/WT Toe Sz 46
0251-9247	One Shoe Blue/WT Toe Sz 47
0051 0406	One Chae Dink MIT Too C- CC
0251-9436	One Shoe Pink/WT Toe Sz 36
0251-9437	One Shoe Pink/WT Toe Sz 37
0251-9438	One Shoe Pink/WT Toe Sz 38
0251-9439	One Shoe Pink/WT Toe Sz 39
0251-9440	One Shoe Pink/WT Toe Sz 40
0251-9441	One Shoe Pink/WT Toe Sz 41
0251-9442	One Shoe Pink/WT Toe Sz 42
0251 0626	One Shee Black MIT Too Stage
0251-9636	One Shoe Black/WT Toe Sz 36
0251-9637	One Shoe Black/WT Toe Sz 37
0251-9638	One Shoe Black/WT Toe Sz 38
0251-9639	One Shoe Black/WT Toe Sz 39
0251-9640	One Shoe Black/WT Toe Sz 40
0251-9641	One Shoe Black/WT Toe Sz 41
0251-9642	One Shoe Black/WT Toe Sz 42
0251-9643	One Shoe Black/WT Toe Sz 43
0251-9644	One Shoe Black/WT Toe Sz 44
0251-9645	One Shoe Black/WT Toe Sz 45
0251-9646	One Shoe Black/WT Toe Sz 46
0251-9647	One Shoe Black/WT Toe Sz 47

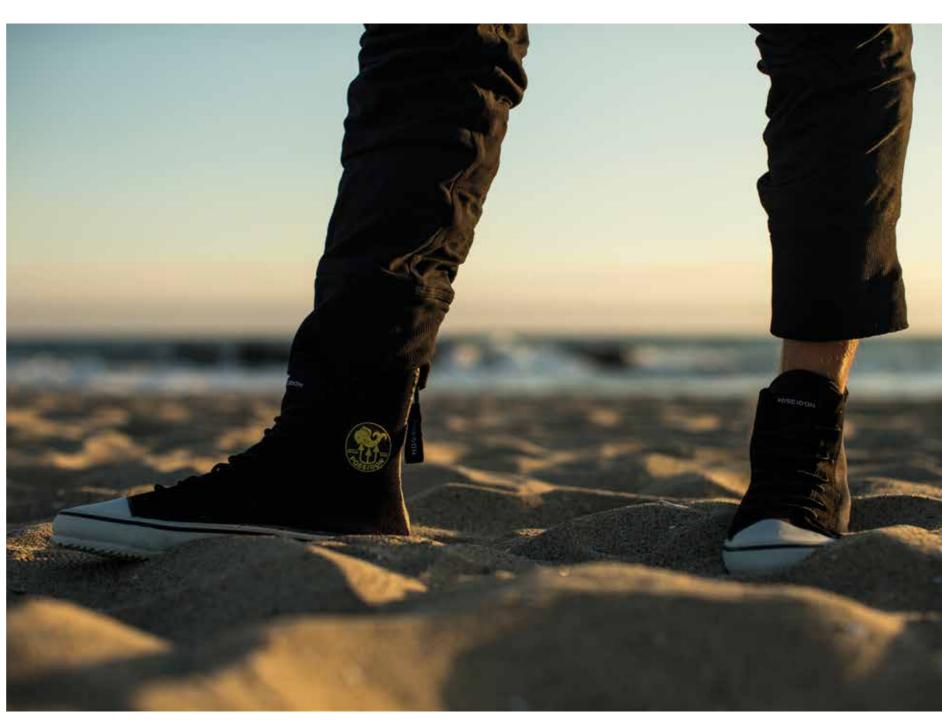

EU	36		37		38		39		40		41	
	Male	Female										
USA		5		6	5	7	6	8	7	9	8	10
UK	4	3.5	4.5	4	5.5	5	6.5	6	7	6.5	7.5	7
CM	23	3,5	23	3.8	24	.5	25		25	.4	25	5.7

EU	4	2	4	.3	4	.4	4	5	4	6	4	.7
	Male	Female										
USA	9	11	10		11		12		13		14	
UK	8	7.5	8.5	8	10	9.5	11	10.5	12	11.5	13	12.5
СМ	2	16	26	6.7	27	7.3	27	7.9	29	9.2	29	9.8

### BLACK, RED & WHITE LINE MASK

High performance and high style are combined in the new Poseidon Line Mask, featuring LVSL® technology.

### COLORS



Art. no.	Description				
0720-160	Black Line Mask				
0720-140	Red Line Mask				
0720-110	White Line Mask				

### MATERIAL:

Ultra clear lens.

Frameless mask with skirt in high quality silicone and silicone strap.

### THREEDEE

A low volume mask that fits most faces. A robust frame and with optical lenses

### COLORS

BK/black, BK/kevlar, BK/yellow, BK/yellow, BK/red, with black with black with black with clear with black with clear silicone silicone silicone















Art. no.	Description				
8700-BKBK BS	Mask 3D - Black/Black, BS				
8700-BKKV BS	Mask 3D - Black/Kevlar, BS				
8700-BKYW BS	Mask 3D - Black/Yellow, BS				
8700-BKYW CS	Mask 3D - Black/Yellow, Clear Silicone				
8700-BKRD BS	Mask 3D - Black/Red, BS				
8700-PIWH CS	Mask 3D - Pink/White, Clear Silicone				
8701-XX-L*	Lens Mask 3D - Left				
8701-XX-R*	Lens Mask 3D - Right				

### **TECHNICA**

Classic mask with ultra low volume. Very popular among technical divers and free divers.

### COLORS

Black/grev



Art. no.	Description
8684-GKGA BS	Mask Technica, grey/black gomma

### MATERIAL:

A compact mask with rubberised surface and double glass.



### TECHNICAL FEATURES:

Enhanced field of vision from angled lens. Easy to clear low volume profile Flood resistant extra deep, ultra soft skirt. Works great with beards

Poseidon's Black Line Mask was inspired by rebreather divers who need the maximum field of vision combined with a minimal gas requirement toclear the mask. To answer their needs, we developed LVSL © Low-Volume Single-Lens technology to give a unique combination of features that benefit all divers.



### MATERIAL:

Our exclusive ultra-light two-lens mask has an ultra-light polymer frame and comfort fit skirt in high quality silicone.

The side buckles swivel 45 degrees and are strong and easy to adjust. Colors include matte and metallic surfaces, and 'Poseidon yellow'

### TECHNICAL FEATURES:

Prescription lenses available online Lens 3D from -1.5 to -9.0 in steps of 0.5. Comfort fit suits most face shapes. Easy to clear thanks to low volume profile





### TECHNICAL FEATURES:

Perfect free-diving mask. Easy to clear, ultra-low-volume. Stand-out rugged, stylish look.

Poseidon's Technica Mask was inspired by free-divers who need the minimum gas requirement to clear their masks. The Technica Mask's rugged looks will set you apart from the crowd and perform flawlessly. Dive after dive.

# BLACK, RED & WHITE LINE SNORKEL





Lightweight. Foldable. Functional. The new Poseidon Snorkel. Black, Red or White Line

### COLORS





Art. no.	Description
0730-000	Black Line Snorkel
0730-040	Red Line Snorkel
0730-010	White Line Snorkel

### MATERIAL:


Silicone mouthpeice with TPR tube.

### TECHNICAL FEATURES:

Lightweight and compact for easy travel. Foldable design for easy storage on dives. Wraparound design for streamlined swimming. Perfect companion to any Poseidon Mask.

### TRIDENT FIN





### Art. no. Description 0710-062 Trident Fin Red - Size M Trident Fin Red - Size L 0710-063 0710-064 Trident Fin Red - Size XL 0710-065 Trident Fin Red - Size XXL 0710-032 Trident Fin Black - Size M 0710-033 Trident Fin Black - Size L

Trident Fin Black - Size XL



divers.

# TECHNICAL FEATURES:

COLLECTION COLORS

Black

> Short rubber fin for the technical diver

Made from 100% rubber with rubber coated

- > Easy on and off

MATERIAL:

stainless steel strap.

- > Stainless steel strap with easy grip
- > High force fin with edges for maneuvrability

### SIZE CHART, RUBBER FINS

0710-034

	Description	Size	USA	France	Japan	Length (cm)
A CONTRACTOR OF THE PARTY OF TH	Trident Fin	М	6-8	39-41	24-25	46
prof ( )	Trident Fin	L	9-11	42-44	26-27	48.5
	Trident Fin	XL	12-13	45-46	28-29	51
	Trident Fin	XXL	13-15	46-48	30	52

# STAINLESS STRAP +CLIP TRIDENT FIN

### Prod. Code Product Name

	- I Todaot I Idaii
0750-012	Stainless Strap+Clip Trident Fin - M - Black
0750-013	Stainless Strap+Clip Trident Fin - L - Black
0750-014	Stainless Strap+Clip Trident Fin - XL - Black
0750-015	Stainless Strap+Clip Trident Fin - XXL - Black
0750-027*	Stainless Strap+Clip Trident Fin - M - Red
0750-029*	Stainless Strap+Clip Trident Fin - XL - Red

45

# STAINLESS CLIP TRIDENT FIN

### Prod. Code Product Name

0750-006 Stainless Clip Trident Fin



# BALLISTIC GEAR BAGS

Poseidon's gear bags are waterproof, made in ballistic nylon and designed to withstand the toughest environments and challenges. Only available in Black. Sizes: 20 L, 52 L and 110 L.

### COLORS

E	DIACK	
1		
•		

Art. 110.	Description
0650-001	Ballistic Gear Bag Black 20 L Removable camera insert
0650-002	Ballistic Gear Bag Black 52 L
0650-003	Ballistic Gear Bag Black 110 L

### MATERIAL:

Made in Ballistic Nylon 1680.

### TECHNICAL FEATURES:

Dry bags with additional outside pocket, inside lining with pockets, padded shoulder strap.



# REGULATOR BAG

Art. no.	Description	P
7615	Regulator Bag	



# MULTITOOL

Rubberised multitool with most commonly used tools for diving.

Art. no.	Description
0655-003	Multi tool Metric



# DAY PACK BAG

Poseidon's travel bag in ballistic nylon vith water valves for wet equipment.

# COLORS

Art. no.	Description
0650 006	Day Pack Rag

### MATERIAL:

Ballistic Nylon, Nylon straps, YKK waterproof

# TECHNICAL FEATURES:

Waterproof side pockets, main pocket with holes in bottom, inside padding with additional asseccory pockets.



The Poseidon Professional 500 m dive watch is back. Available with yellow or black dial.

Quartz movement, uni-directional rotating bezel, illuminated markings and date at 3 o'clock, water resistent to 500 m.


Black or yellow dial with date. Sapphire glass. Diameter 46 mm, thickness 12 mm.



Description 0610-001 Dive Watch Professional 500 m YW



7 11 11 1101	Boomption
0610-003	Dive Watch Professional 500 m BK

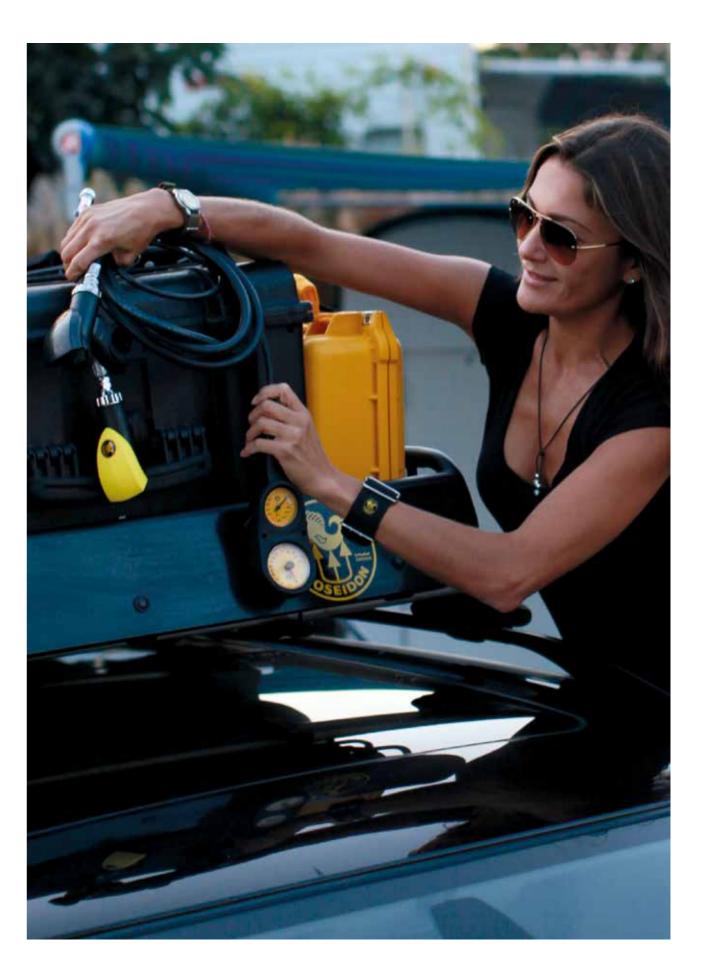



# WING MAN, SIDE SLING BAG

## COLORS



Description
Side Sling Case 7 L / 55 CF
Side Sling Case 5 L / 40 CF
Side Sling Case 11 L/80 CF

### MATERIAL:

Ballistic Nylon 1680, YKK Waterproof Zipper, Military Mesh, Octupus Velcro.



### TITANIUM KNIFE

The Black Line Titanium Knife offers the ultimate combination of high quality and rugged design. The custom sheath with quick release mechanism ensures that your knife will be instantly available whenever you need it. The titanium blade and hammer tip will ensure that it is up to any task you put it to.

### COLORS

Art. no.	Description
0655-011	Black Line Titanium Knife

# MATERIAL:

Titanium blade with TPR handle, POM sheath and neoporene harness.

### TECHNICAL FEATURES:

Titanium blade for ultimate quality. Hammer tip.

Quick-release polyurethane sheath with neoprene securing straps.



LINE CUTTER

Titanium line cutter with multifunction casing, both velcro and webbing.

### COLORS

Titanium with black case



Art. no.	Description
0655-002	Line cutter

48



# **NECK STRAP MASK** SILICON BLACK

Art. no.	Description
8095 01*	Neck Strap Mask Silicon Black



# **NECK STRAP MASK** SILICON CLEAR

Art. no.	Description
8095 02*	Neck Strap Mask Silicon Clear



# **XSTREAM**

Art. no.	Description	
4540*	Neck Strap Xstream	



# MOUTHPIECE INCL. STRAPS

Art. no. Description 0005-009 Mouthpiece incl. straps



### NECKSTRAP

Ultra comfortable neckstrap in 2 mm neoprene with anti-slide velcro.

### COLORS

Black



Art. no.	Description
3709 06	Nackband mask neopr. Velcro

## MATERIAL:

Jako neoprene in 2 mm. Available in Black with Poseidon rubber logo.

### TECHNICAL FEATURES:

Anti-slide velcro patches.



# BACKPLATE STEEL ONE HARNESS/ BESEA

Stainless steel replacement for the plastic backplate integrated in the of weight.



One Harness and adds an extra 2kg

Art. no.	Description	
0000-256*	Backplate Steel Besea	



# **BOLT KIT** BESEA BUTTERFLY

Art. no.	Description
000-93*	Bolt Kit Besea Butterfly



# ANTI-FREEZE CAPS INCL. STRAPS

Art. no.	Description	
1286	Anti-freeze Caps	
1286	Anti-freeze Caps	



# D-RING KIT BESEA PREBENT

Art. no.	Description
001-91*	D-Ring Kit Besea Prebent



### LUBRICANT STICK

Art. no.	Description	
0000-181	Lubricant Stick 20 g	

APPAREL



# POSEIDON CAP ALL GOOD

Cap with embroided logo.

COLORS







# POSEIDON CAP 58

Cap with with Poseidon 58 text and embroided logo back.

COLORS

Black

Art. no.	Description
0040-011	Poseidon Cap 58



# POSEIDON POWER STRECH HAT

COLORS

Black

Art. no.	Description
7011-BK	Poseidon Power Strech Hat



POSEIDON SWEATSHIRT FISH

Navy, with Poseidon logo Warm white

COLORS

Navy

Art. no.	Description
0040-111	Poseidon Sweatshirt Fish, Navy S
0040-112	Poseidon Sweatshirt Fish Navy M
0040-113	Poseidon Sweatshirt Fish, Navy L
0040-114	Poseidon Sweatshirt Fish, Navy XL
0040-115	Poseidon Sweatshirt Fish, Navy XXL





POSEIDON ZIP HOODED SWEATSHIRT

Navy, with Poseidon logos Yellow

COLORS

Navy

Art. no.	Description
0040-103	Poseidon Zip Hooded Sweatshirt Fish, Navy S
0040-104	Poseidon Zip Hooded Sweatshirt Fish Navy M
0040-105	Poseidon Zip Hooded Sweatshirt Fish, Navy L
0040-106	Poseidon Zip Hooded Sweatshirt Fish, Navy XL
0040-107	Poseidon Zip Hooded Sweatshirt Fish, Navy XXL

# POSEIDON POLO FISH

White, with Poseidon logo black. Black, with Poseidon logo Yellow

COLORS

White

Black

DIACK	

Description	
Poseidon Polo Fish, White S	_
Poseidon Polo Fish, White M	
Poseidon Polo Fish, White L	
Poseidon Polo Fish, WhiteXL	_
Poseidon Polo Fish, White XXL	
Poseidon Polo Fish, Black S	
Poseidon Polo Fish, Black M	_
Poseidon Polo Fish, Black L	
Poseidon Polo Fish, Black XL	
Poseidon Polo Fish, Black XXL	_
	Poseidon Polo Fish, White S Poseidon Polo Fish, White M Poseidon Polo Fish, White L Poseidon Polo Fish, White L Poseidon Polo Fish, White XXL  Poseidon Polo Fish, Black S Poseidon Polo Fish, Black M Poseidon Polo Fish, Black L Poseidon Polo Fish, Black XL





APPAREL APPAREL





# POSEIDON T-SHIRT FISH

White, with Poseidon logo Black Navy, with Poseidon logo Yellow

### COLORS

Art. no.	Description
0040-071	Poseidon T-Shirt Fish, White S
0040-072	Poseidon T-Shirt Fish, White M
0040-073	Poseidon T-Shirt Fish, White L
0040-074	Poseidon T-Shirt Fish, White XL
0040-075	Poseidon T-Shirt Fish, White XXL
0040-079	Poseidon T-Shirt Fish, Navy S
0040-080	Poseidon T-Shirt Fish, Navy M
0040-081	Poseidon T-Shirt Fish, Navy L
0040-082	Poseidon T-Shirt Fish, Navy XL
0040-083	Poseidon T-Shirt Fish, Navy XXL

Red, with Poseidon logo light Grey Black, with Poseidon logo dark Grey

Art. no.	Description	
0040-119	Poseidon T-Shirt Fish, Red S	
0040-120	Poseidon T-Shirt Fish, Red M	
0040-121	Poseidon T-Shirt Fish, Red L	
0040-122	Poseidon T-Shirt Fish, Red XL	
0040-123	Poseidon T-Shirt Fish, Red XXL	
0040-127	Poseidon T-Shirt Fish, Black S	
0040-128	Poseidon T-Shirt Fish, Black M	_
0040-129	Poseidon T-Shirt Fish, Black L	
0040-130	Poseidon T-Shirt Fish, Black XL	
0040-131	Poseidon T-Shirt Fish, Black XXL	



# POSEIDON 60TH ANNIVERSARY T-SHIRTS





### COLORS



Art. no.	Description
0040-143	Poseidon T-Shirt Cyklon Zebra, White S
0040-144	Poseidon T-Shirt Cyklon Zebra, White M
0040-145	Poseidon T-Shirt Cyklon Zebra, White L
0040-146	Poseidon T-Shirt Cyklon Zebra, White XL
0040-147	Poseidon T-Shirt Cyklon Zebra White XXI






Art. no.	Description
0040-159	Poseidon T-Shirt Aqua-Sport Zebra, Black S
0040-160	Poseidon T-Shirt Aqua-Sport Zebra, Black M
0040-161	Poseidon T-Shirt Aqua-Sport Zebra, Black L
0040-162	Poseidon T-Shirt Aqua-Sport Zebra, Black XL
0040-163	Poseidon T-Shirt Agua-Sport Zebra, Black XXI





White









Art. no.	Description
0040-151	Poseidon T-Shirt Cyklon, Navy S
0040-152	Poseidon T-Shirt Cyklon, Navy M
0040-153	Poseidon T-Shirt Cyklon, Navy L
0040-154	Poseidon T-Shirt Cyklon, Navy XL
0040-155	Poseidon T-Shirt Cyklon, Navy XXL

### DISCONTINUED PRODUCTS

The number and sizes may be limited. Check availability to order.

We are reducing the color range on certain products. The following products have been discontinued in blue and grey, but will be continued in red and black.

### REBREATHER BCD





AIL IIO.	Description
0337-022	Rebreather BCD Blue XS
0337-023	Rebreather BCD Blue S
0337-024	Rebreather BCD Blue M
0337-026	Rebreather BCD Blue L
0337-027	Rebreather BCD Blue XL
0337-082	Rebreather BCD Grey XS
0337-083	Rebreather BCD Grey S
0337-084	Rebreather BCD Grey M
0337-086	Rebreather BCD Grev I

Description

# TECHNICA SNORKEL

0337-087 Rebreather BCD Grey XL



Designed with comfort and heavy usage in mind, the Technica Snorkel delivers rugged dependability.

### COLORS



Description
Technica Snorkel

### MATERIAL:

Silicone mouthpeice with TPR tube.

### IPAD CASE



Waterproof casing for iPAD available in black Nylon 1680.

### COLORS

Black



Art. no.	Description	
0650-010	IPad Case Black	

### LAPTOP CASE



Waterproof casing for Laptops 15" and 17". Made in Nylon 1680.

### COLORS



Art. no.	Description
0650-011	Laptop Case Black



Buckle stainless s

# BUCKLE INCL. HOOK RELEASE HOOK



Art. no.	Description
3011	Release hook 40 mm

# POSEIDON DIVING SYSTEMS AB

Åkeredsvägen 1 SE-421 63 Västra Frölunda SWEDEN

E-mail: sales@poseidon.com

order@poseidon.com

Phone: +46 31 734 29 00

www.shop.poseidon.com www.poseidon.com

